

# DynamicX2

Aluminium retractable motorised monitor





## Features

- Automatic 20° inclination
- Passive cover plate
- Interactive Setup Display
- Maintenance free
- HDCP compliant

### General

DynamicX2 monitors have been designed for installation into tables or desks.

DynamicX2 are elegant monitors built from a solid aluminium block. They have a vertical motorised movement with automatic 20° inclination to ensure the best ergonomics, viewing angle and visibility. This automatic tilting system provides a fast and silent response and highly reliable, maintenance-free solution. DynamicX2 have slightly curved edges for a contemporary and longstanding look. The range is available with Full HD from 15" to 22" and it can be supplied with adjustable tilt, touch screen, camera, single or double retractable microphones, speakers, voting system and multimedia connectors among others.

- Energy saving design
- Serial control & Remote diagnose
- Individual monitor addressing
- Integrated terminations switch

The anodised aluminium housing can be customised in different colours and finishes. The safety system stops the movement if any resistance is detected for a secure environment.

The standard top-table cover plate is made of brushed stainless steel. It can optionally be supplied with a matt finish or it can disappear when the product is prepared for underneath installation.

DynamicX2 monitors are remotely controllable and diagnosable through the ERT interfaces in an easy and cost effective way.

#### ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

## TECHNICAL SPECIFICATIONS

#### Display

Display	
Size	FULL HD 17.3" TFT Active Matrix
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m2
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/80° (u/d) / 80°/80° (l/r)
Viewing area	381.888 (h) x 214.812 (v) mm
LED backlight lifespan	50.000 hrs
Response time	Tr 37 ms, Tf 3 ms
Temperature (operating/storage)	Operating 0°C - +40°C Storage -20°C - +60°C
Materials	· ·
Frame	Anodised Aluminium
Cover plate	Stainless steel, matt or prepared for underneath installation (to be veneered)
Connectivity	
Input signal	DVI-I (1 input) – HDCP Compliant - Digital / Analog DVI-D (1 input) – HDCP Compliant - Digital
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol
GPI (SubD9)	Up/Down control
LISP Connector for convi	22

Control		
RJ45, RS-422 (I/O)		
Addressing		
Termination switch		
GPI		
IR Remote control (monito	or adjustments): 1/5	
Movement's Control		
User interface on monitor	(Up/Down)	
Remote	RS-422 I/O/GPI	
Electrical		
Low voltage (external power supply)	100-240Vac, 47/63Hz, 12Vdc	
Power consumption	50W	
Mechanical		
Monitor Dimensions:		
Screen	443 x 258 x 25 mm [18.35"x11.54"x0.98"]	
Upper cover plate	540 x 95 x 3 mm [22.20"x3.74"x0.12"]	
Housing below the table	525 x 590 x 80 mm [20.61"x23.23"x3.15"]	
Weight	18.2 kg / 40.1 lbs	
Shipping Dimensions:		
Weight	19.2 kg / 42.3 lbs	
Shipping Box	635 x185 x 725 mm	

USB Connector for service

### Options

- HDMI/ DynamicLoop
- DynamicShare
- Stainless steel box for keyboard and mouse
- Matte cover plate
- Touch screen
- USB camera
- Composite video camera
- HD-SDI camera
- Built in DynamicTalk
- Motorised retractable synchronised single microphone
- Dual motorised synchronised microphones

## Certifications

• CE

- USB integrated on cover plate
- 2 USB integrated on cover plate
- USB power integrated on cover plate
- Customised cover plate with speaker, voting system, USB connector
- Prepared for underneath installation, cover plate prepared to be veneered
- Additional Customised laser engraved logotype on the cover plate
- Monitor housing anodised in different colours
- Adjustable tilt

## WARRANTY

- 5 years limited warranty
- 2 years general warranty

#### ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

CONNECTIVITY

3- GPI control

4- Power input


2- USB for Service

6- DVI 2 video input


1- AHnet control interface

5- DVI 1 / DVI A video input

### CONNECTIVITY PANEL

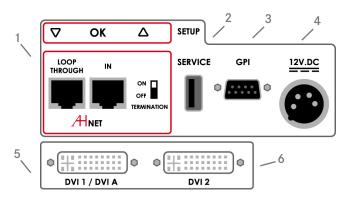

#### INTERACTIVE SETUP DISPLAY

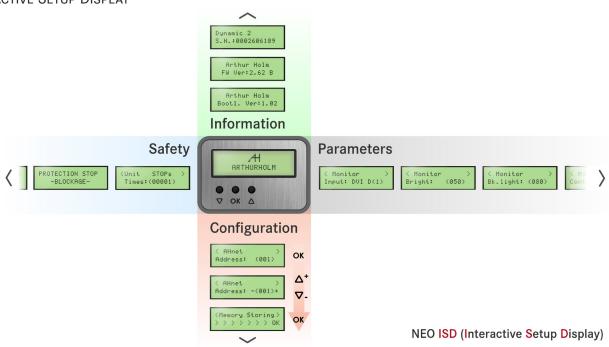

### ARCHITECT'S SPECIFICATIONS

Single motor retractable 17.3" Full HD monitor with 20° of automatic inclination. Low voltage. Solid block of aluminium monitor housing in natural anodised finishing, with rounded corners design. Passive opening cover plate for enhanced reliability. DVI-I and DVI-D connectors, HDCP compliant inputs.

Easy to read Interactive Set-Up Display (ISD) 2.2" LCD display, allowing local and remote configuration, operation and troubleshooting without having to remove the monitor from the furniture. When connected to the AH ERT interface, the assisted addressing system facilitates the address configuration by simply pressing one button in an easy and convenient way.


Embedded speed and protection pre-sets for quick restore to factory values (enabling a rapid reset to factory values if required). Auto-check feature for auto-diagnostic and internal protection functions. USB port for local firmware upgrade. Safety system that detects obstructions (causing unit to stop).

Adjustable mechanical parameters through AHnet or ISD for calibration and adjustment of mechanics. Adjustable parameters of brightness, contrast and backlight through RS-422. External power supply with 4-Pin XLR4 connector.

#### ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

General Dimensions

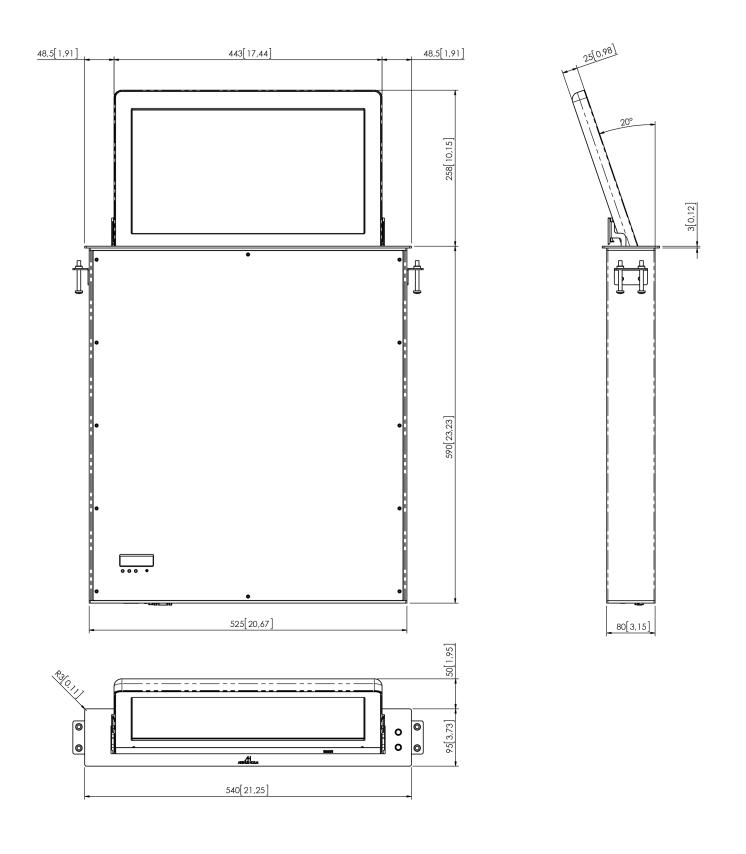

ARTHUR HOLM Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com