
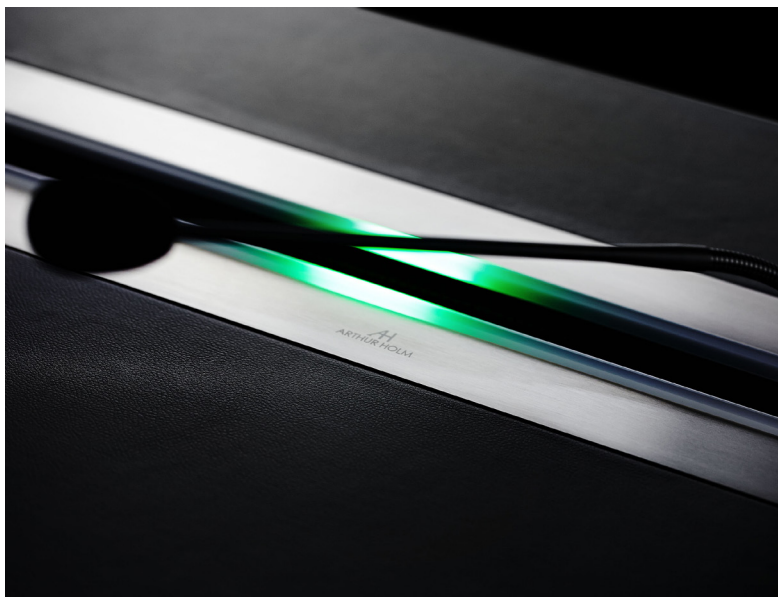


## DynamicTalkH

Universal motorised horizontal lift system for “gooseneck” microphones

---

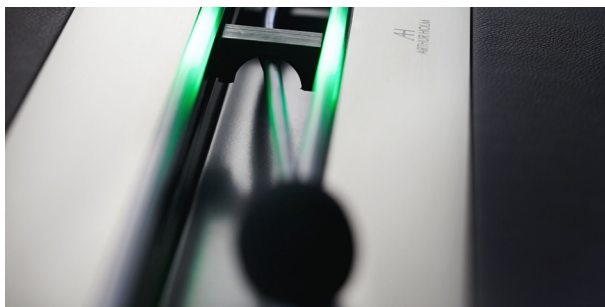

### FEATURES

- Adapts to 40 cm length microphones
- Low space required underneath the table
- Dynamic LED to indicate microphone's status
- Maintenance free
- Serial control & Remote diagnose

### GENERAL

DynamicTalkH microphone lifts have been designed for installation into tables or desks.

DynamicTalkH is a horizontal lift for gooseneck microphones. The system has been specially developed to optimize the space underneath the table where it will be installed; room for legs won't be a problem any longer. Silent, remotely controllable and yet elegant, reliable and easy to install, it's easy to install and can be veneered to match table's surface. The system allows the microphone to be bended and it automatically takes it back to its original horizontal position.

DynamicTalkH not only makes the microphone disappear within the desk surface but it also provides a pleasant interior light to indicate its status (the light can change from

red to green). Microphones are safely stored and protected and the meeting and conference rooms become versatile to be used for different purposes.

DynamicTalkH has 2 different working modes; PA and Conference. When in PA mode, a push button placed on the cover plate, allows to activate or de-activate the microphone. A LED light ring will indicate the status by changing colour, from green to red. The system will silence the microphone when this is in retracted position. When in Conference mode, the microphone will always be active and both the light ring and the access to the push button on the cover plate will be available through a connector (GPI/GPO). In this mode, the system is ready to be connected and controlled through a conference system.

## TECHNICAL SPECIFICATIONS

<b>DynamicTalk Control</b>	
Up/Down Control	GPI contact closer
	RS-422 (RJ45 CAT 5)
Microphone control	Button on upper cover plate
GPI/O	LEDs control and switch
<b>Electrical</b>	
External power supplies	100-240Vac, 50/60Hz, 12Vdc
Power consumption	20W
<b>Mechanical</b>	
Dimensions	134 x 544 x 144 mm [5.2"x21.4"x5.6"]
Weight	9 Kg / 19.8 lbs
Shipping Dimensions:	
Weight	10 Kg / 22 lbs
Shipping Box	202 x 622 x 212 mm

## OPTIONS

- USB integrated on cover plate
- USB power integrated on cover plate
- Customised cover plate with speaker, voting system, conference system
- Customised laser engraved logotype on the cover plate
- Custom microphone connection
- Anodisation in different colours


## CERTIFICATIONS

- CE

## WARRANTY

- 2 years general warranty


## CONNECTIVITY PANEL

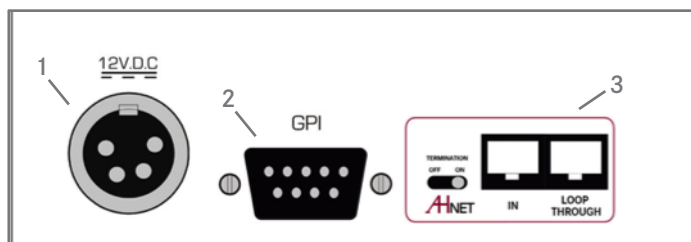

## CONNECTIVITY

- 1- Power input
- 2- GPI control
- 3- AHnet control interface

## INTERACTIVE SETUP DISPLAY

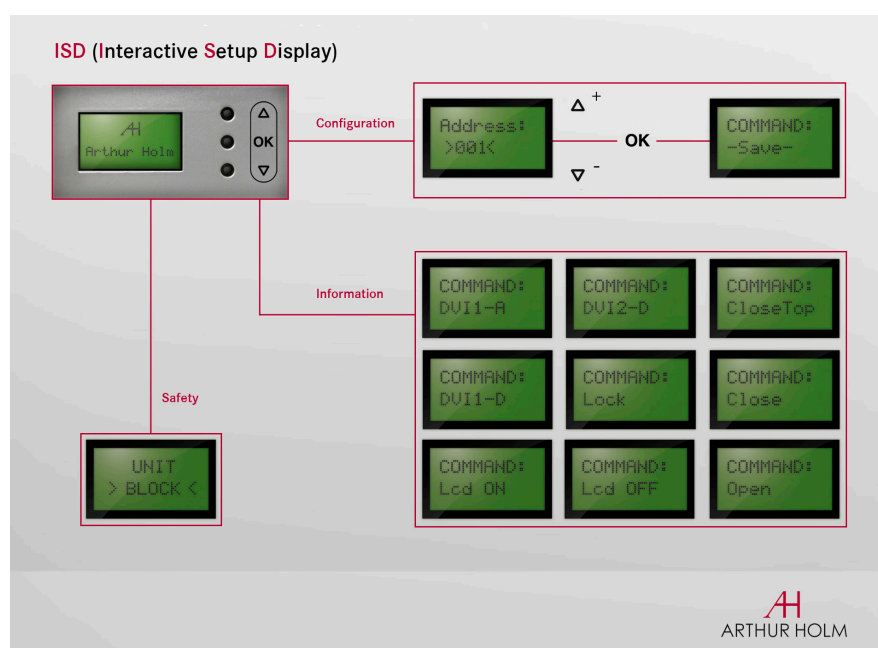

## ISD


- 1- Configuration
- 2- Information
- 3- Safety

## ARCHITECT'S SPECIFICATIONS

Low voltage professional retractable horizontal lift system for microphones up to 400 mm long. Brushed stainless steel cover plate with hidden button for opening. Optimised space underneath the table. Programmable green and red LED for microphone status indication. Designed to avoid microphone damage or blockage when retracting. Operation modes for using standard microphones and conference systems. AHnet open protocol, allowing independent

remote control of up to 30 units over a daisy-chain CAT-5 line. Additional control by means of the buttons integrated on the cover plate and the general purpose interface inputs and outputs .

Easy to read Interactive Set-Up Display (ISD) 1,6"LCD display for address setup and status monitoring.

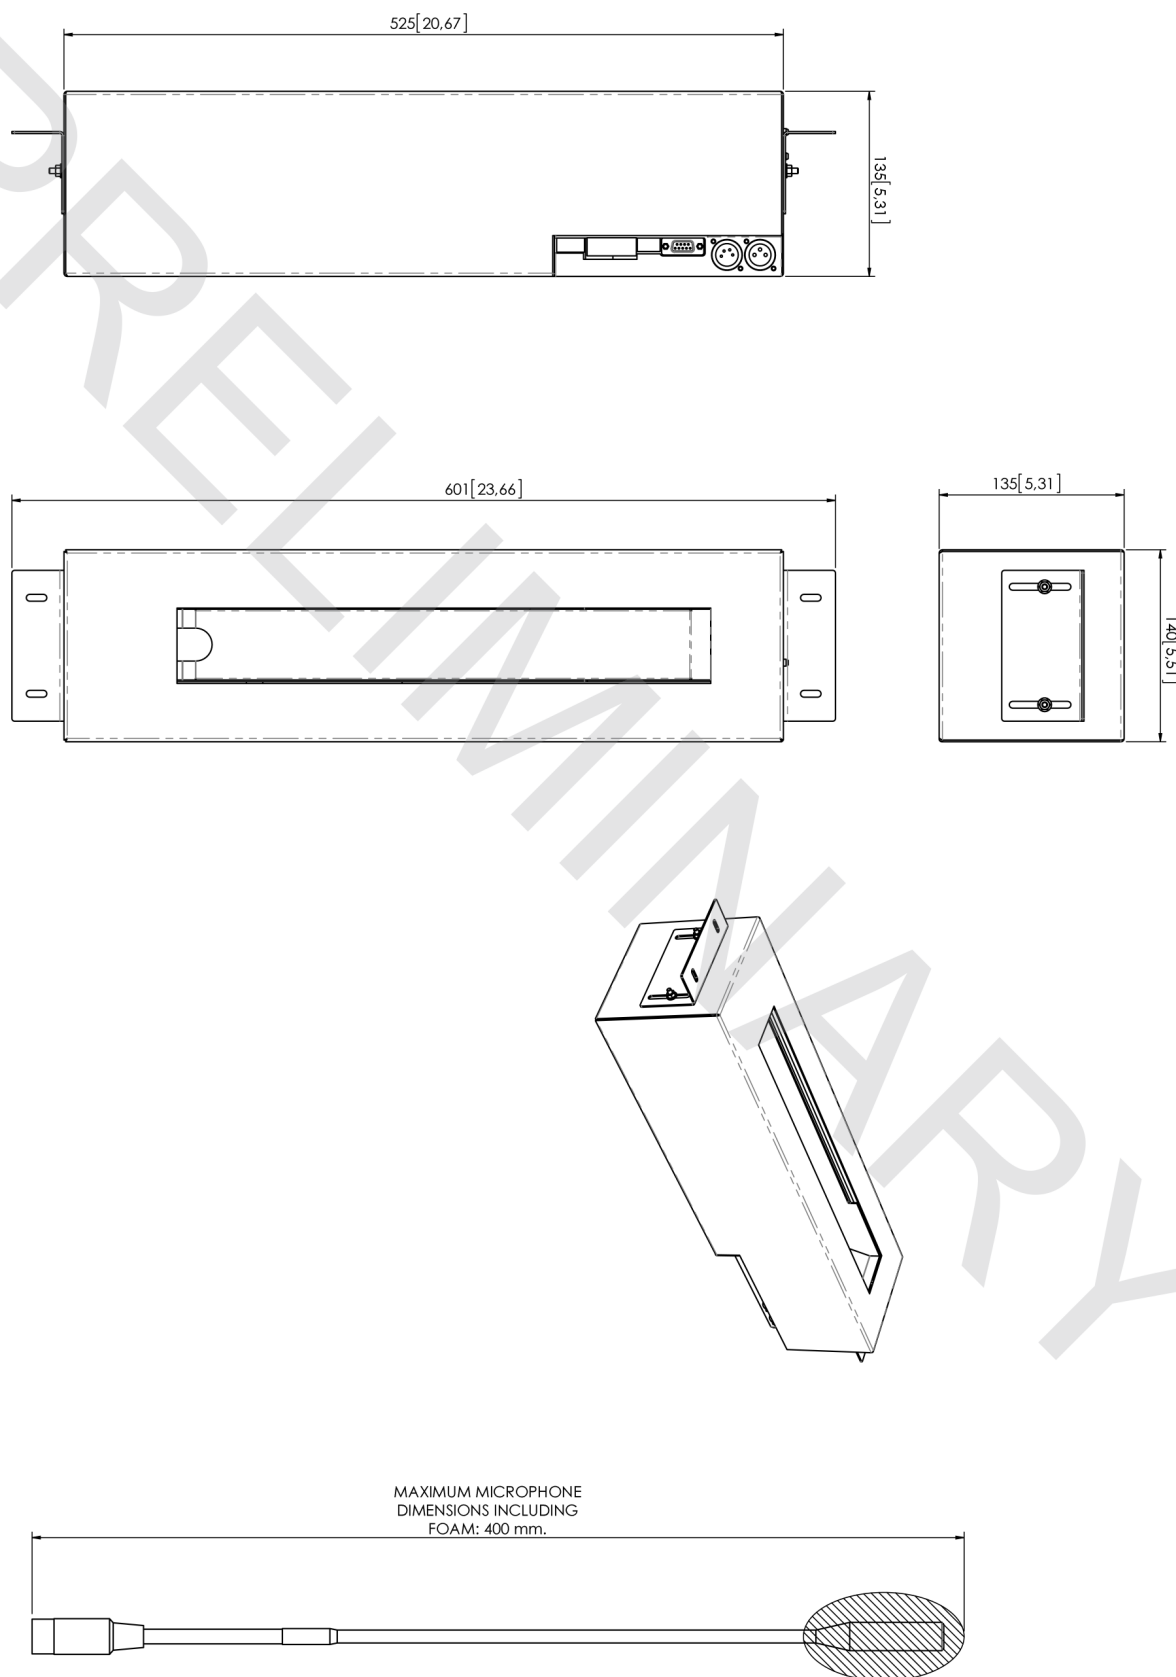

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · [marketing@arthurholm.com](mailto:marketing@arthurholm.com)  
[www.arthurholm.com](http://www.arthurholm.com)

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.