
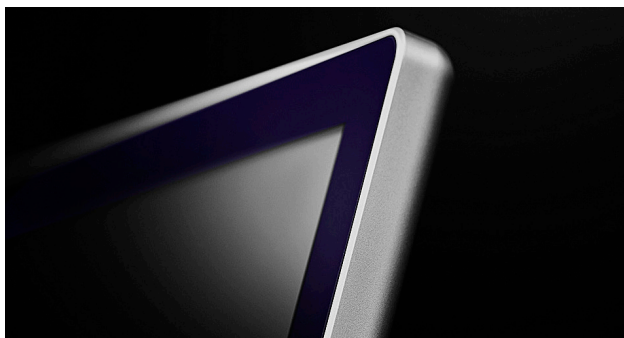


DynamicX2

Aluminium retractable motorised monitor



FEATURES

- Automatic 20° inclination
- Passive cover plate
- Interactive Setup Display
- Maintenance free
- HDCP compliant
- Energy saving design
- Serial control & Remote diagnose
- Individual monitor addressing
- Integrated terminations switch

GENERAL

DynamicX2 monitors have been designed for installation into tables or desks.

DynamicX2 are elegant monitors built from a solid aluminium block. They have a vertical motorised movement with automatic 20° inclination to ensure the best ergonomics, viewing angle and visibility. This automatic tilting system provides a fast and silent response and highly reliable, maintenance-free solution. DynamicX2 have slightly curved edges for a contemporary and longstanding look. The range is available from 15" to 22" and it can be supplied with adjustable tilt, touch screen, camera, single or double retractable microphones, speakers, voting system and multimedia connectors among others.

The anodised aluminium housing can be customised in different colours and finishes. The safety system stops the movement if any resistance is detected for a secure environment.

The standard top-table cover plate is made of brushed stainless steel. It can optionally be supplied with a matt finish or it can disappear when the product is prepared for underneath installation.

DynamicX2 monitors are remotely controllable and diagnosable through the ERT interfaces in an easy and cost effective way.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

TECHNICAL SPECIFICATIONS

Display

| | |
|------------------------------------|------------------------------------------------|
| Size | FULL HD 15.6" TFT Active Matrix |
| Resolution | 1920 (h) x 1080 (v) |
| Brightness | 400 cd/m2 |
| Contrast ratio | 1500:1 |
| Pixel | 0.1792 (h) x 0.1792 (v) mm |
| Viewing angle | 85°/85° (u/d) / 85°85° (l/r) |
| Viewing area | 344.16 (h) x 193.59 (v) |
| LED backlight lifespan | 70.000 hrs |
| Response time | Tr + Tf = 35ms |
| Temperature (operating/storage) | Operating 0°C – +40°C Storage -20°C – +60°C |

Materials

| | |
|-------------|---------------------------------------------------------------------------------------------------|
| Frame | Anodised Aluminium |
| Glass | AR 2-side with an anti-reflective coating on the glass surface. Thickness: 3.0 ± 0.3 mm |
| Cover plate | Stainless steel, matt or prepared for underneath installation (to be veneered or for table hedge) |

Connectivity

| | |
|-----------------------|---------------------------------------------------------------------------------------------------------|
| Input signal | DVI-I (1 input) – HDCP Compliant - Digital / Analog DVI-D (1 input) – HDCP Compliant - Digital |
| RJ45 CAT5 (with loop) | Addressable RS422 monitor control by AHnet protocol |
| GPI (SubD9) | Up/Down control |

Control

| |
|------------------------------------------------|
| RJ45, RS-422 (I/O) |
| Addressing |
| Termination switch |
| GPI |
| IR Remote control (monitor adjustments): 1 / 5 |

Movement's Control

| | |
|---------------------------|----------------|
| User interface on monitor | (Up/Down) |
| Remote | RS-422 I/O/GPI |

Electrical

| | |
|----------------------------------------|----------------------------|
| Low voltage (external power supply) | 100-240Vac, 47/63Hz, 12Vdc |
| Power consumption | 40W |

Mechanical

| | |
|-------------------------|--------------------------------------------------|
| Monitor Dimensions: | |
| Screen | 403 x 234.16 x 25 mm [15.87" x 9.22" x 0.98"] |
| Upper cover plate | 500 x 95 x 3 mm [19.68" x 3.73" x 0.12"] |
| Housing below the table | 485 x 590 x 80 mm [19.09" x 23.23" x 3.15"] |
| Weight | 17.9 kg / 39.4 lbs |
| Shipping Dimensions: | |
| Weight | 18.9 kg / 41.6 lbs |
| Shipping Box | 615 x 165 x 705 mm |

OPTIONS

- HDMI/ DynamicLoop
- DynamicShare
- Stainless steel box for keyboard and mouse
- Matte cover plate
- Touch screen
- USB camera
- Composite video camera
- HD-SDI camera
- Built in DynamicTalk
- Motorised retractable synchronised single microphone
- Dual motorised synchronised microphones

CERTIFICATIONS

- CE

- USB integrated on cover plate
- 2 USB integrated on cover plate
- USB power integrated on cover plate
- Customised cover plate with speaker, voting system, USB connector
- Prepared for underneath installation, cover plate prepared to be veneered
- Additional Customised laser engraved logotype on the cover plate
- Monitor housing anodised in different colours
- Adjustable tilt

WARRANTY


- 5 years limited warranty
- 2 years general warranty

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.


CONNECTIVITY PANEL

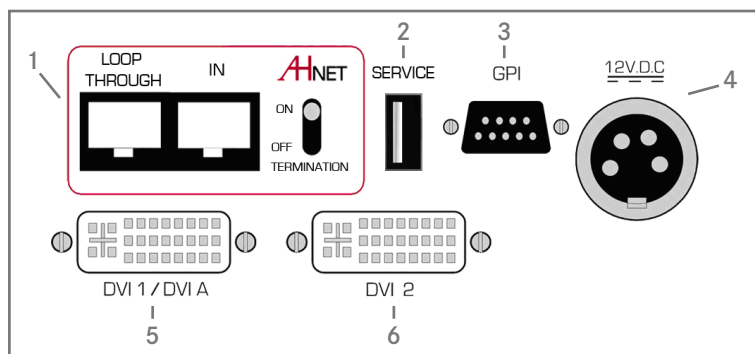

CONNECTIVITY

- 1- AHnet control interface
- 2- USB for service
- 3- GPI control
- 4- Power input
- 5- DVI-1 /DVI-A video input
- 6- DVI-2 video input

INTERACTIVE SETUP DISPLAY

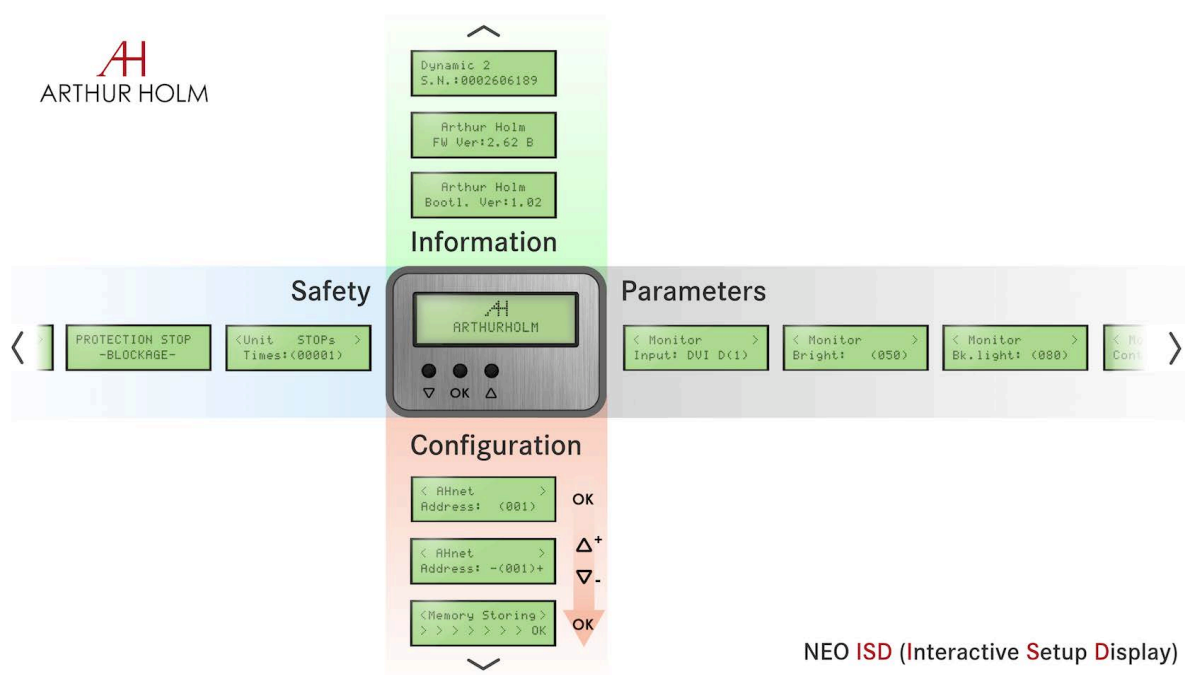

NEO ISD (Interactive Setup Display)

ARCHITECT'S SPECIFICATIONS

Low voltage professional electrically retractable 15.6" FULL HD monitor with 20 degrees of automatic inclination. Solid block of aluminium monitor housing in natural anodized finishing, with rounded corners design. Front double sided anti-reflective 3 mm black-edged glass. Passive opening cover plate for enhanced reliability. DVI-I and DVI-D connectors, HDCP compliant inputs.


Compatible with AHnet open protocol over RS-422, allowing individual remote control of up to 30 units per line over a daisy chain CAT-5 or CAT-6 line and control up to 900 monitors using the AHnet Control System. Additional control by means of the buttons integrated on the cover plate that can be activated or deactivated by using the

AHnet protocol. Easy to read Interactive Set-Up Display (ISD) LCD display for address setup and status monitoring. Dual Pulse Time safety system that detects obstructions, stopping the unit. External power supply with 4-Pin XLR4 connector.

Bottom connectivity for easy access and removal of monitor. Monitor housing total depth is 590 mm, plus additional spacing for connectors. Adjustable parameters through AHnet or ISD allowing calibration and adjustment of mechanics. Diagnostic readout on ISD for service and support.

GENERAL DIMENSIONS

AH15DX2HDGA

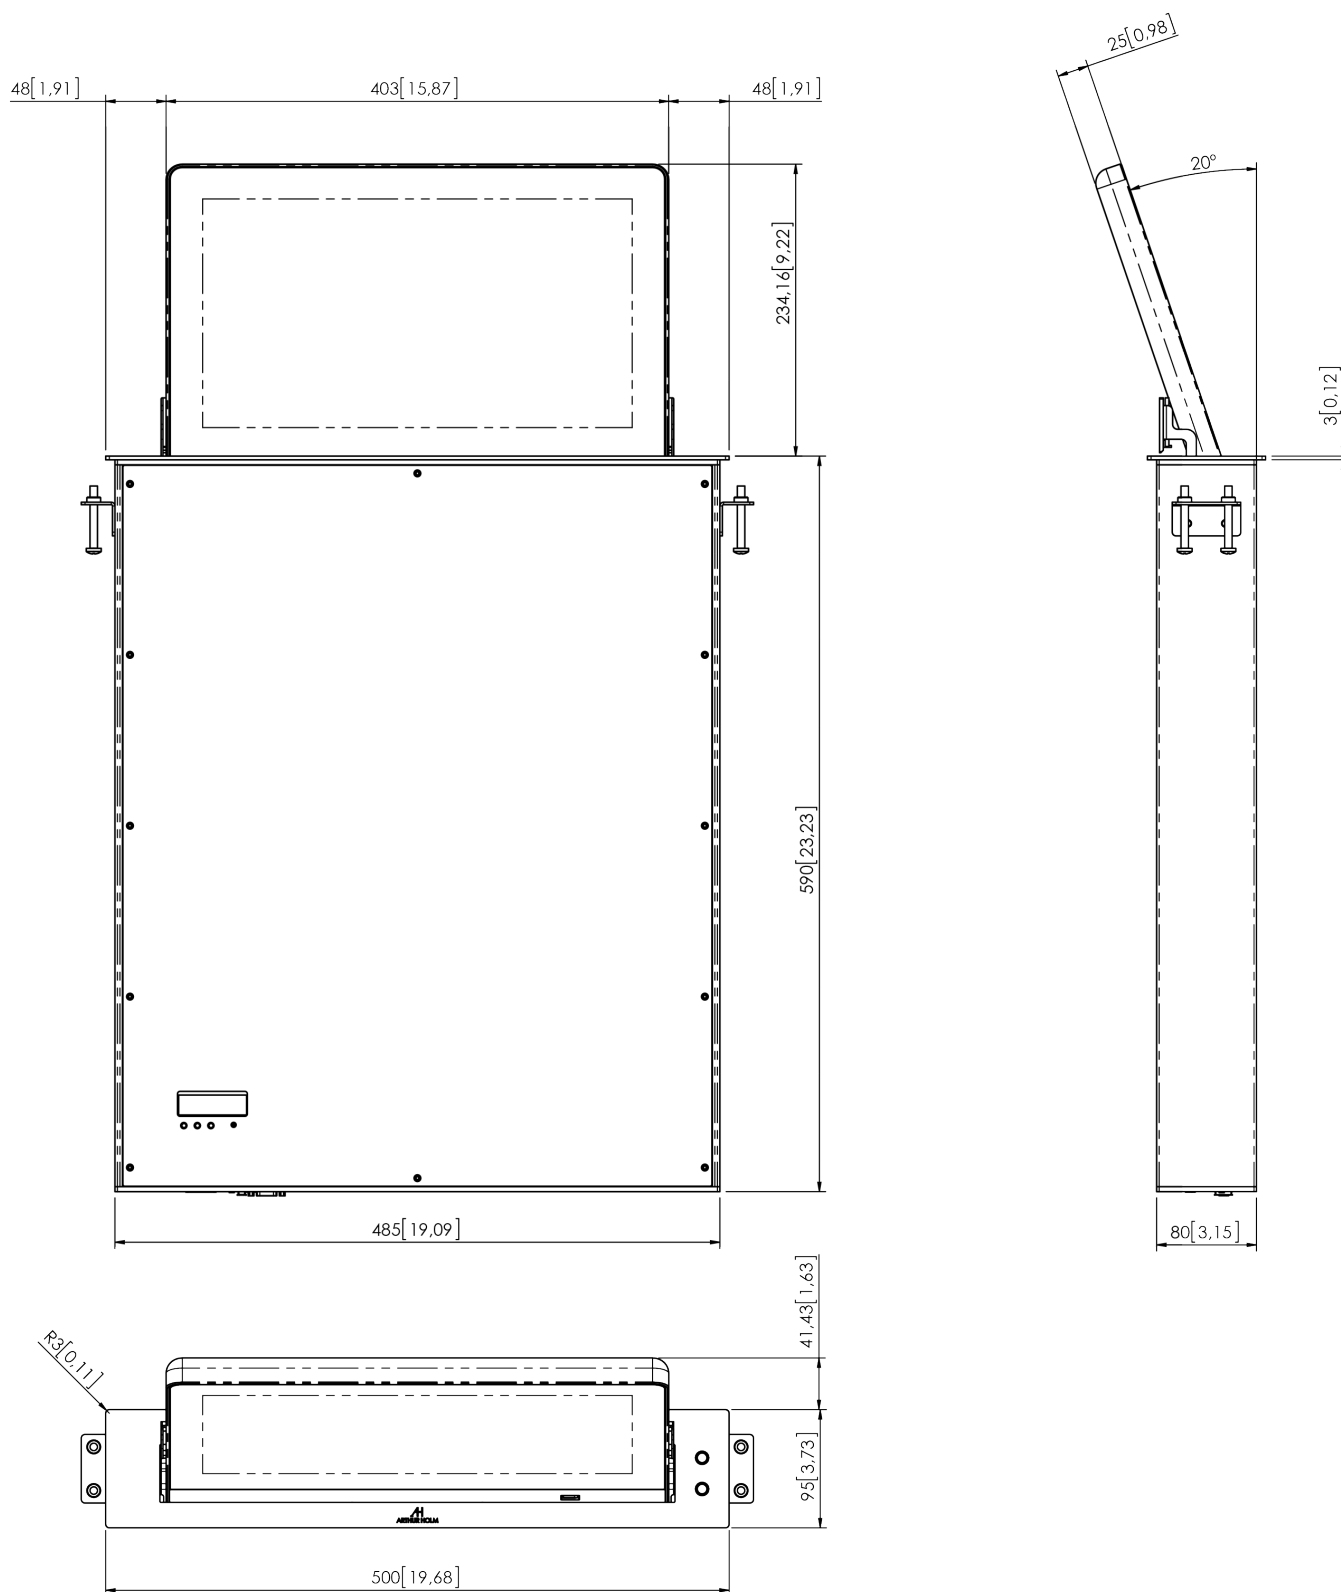

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.